

Prompt neutron lifetime calculations for the NIRR-1 reactor

Yakubu V. Ibrahim^{*1}, Micheal O. Adeleye^{2a}, Raymond L. Njinga^{3b}, Henry C. Odoi^{4c}
and Sunday A. Jonah^{1d}

¹Centre for Energy Research and Training, Ahmadu Bello University, Zaria, Nigeria

²Bingham University, Karu, Nasarawa State, Nigeria

³Ibrahim Badamasi Babangida University, Lapai, Niger State, Nigeria

⁴School of Nuclear and Allied Sciences, University of Ghana, Legon, Accra, Ghana

(Received March 4, 2015, Revised June 29, 2015, Accepted June 30, 2015)

Abstract. Prompt neutron lifetime calculations have been performed for the NIRR-1 reactor HEU and LEU cores using the $1/\nu$ insertion and the Adjoint flux weighing methods. Results of calculations obtained for the HEU and LEU cores are respectively 57.3 ± 0.8 and 47.5 ± 0.7 for the $1/\nu$ insertion and 56.9 ± 0.3 and 46.3 ± 0.5 for the Adjoint flux. There is a good agreement seen between the two methods for both cores. The prompt neutron lifetime was observed to be shorter in the LEU than for the HEU as expected. However, the Adjoint flux weighing method seemed to be the easiest method in calculating the prompt neutron lifetime for NIRR-1.

Keywords: prompt neutron lifetime; HEU; LEU; MCNP; enrichment; MNSR; neutron activation analysis

1. Introduction

The Nigeria Research Reactor-1 (NIRR-1) is a commercial version of the Miniature Neutron Source Reactor (MNSR) designed by China Institute of Atomic Energy (CIAE). It is a pool type reactor, with a compact core having a low critical mass of about 1 kg. It is fueled with HEU consisting of 347 fuel pins in a single fuel assembly enriched to about 90.2% in UAl metal alloy clad with Al.

The fuel assembly consists of ten concentric zones or rings of 350 fuel lattices distributed about a single central control rod. The rated power is 31 kW corresponding to a peak thermal flux of 10^{12} n/cm².s. The core is cooled and moderated (with H/U ratio=197) by light water with beryllium as the reflector making the reactor critical with a limited ($1/2 \beta_{eff}$) built in clean cold excess reactivity of about 4 mk. It has large negative temperature coefficient of reactivity which boosts its inherent safety.

The reactor is designed specifically for Neutron Activation Analysis, Education and training

*Corresponding author, Ph.D., E-mail: yakubviva@yahoo.com

^aPh.D., E-mail: michaeladeleye@hotmail.com

^bPh.D., E-mail: njingaraymond@yahoo.co.uk

^cPh.D., E-mail: hencilod@gmail.com

^dPh.D., E-mail: jonahsa2001@yahoo.com

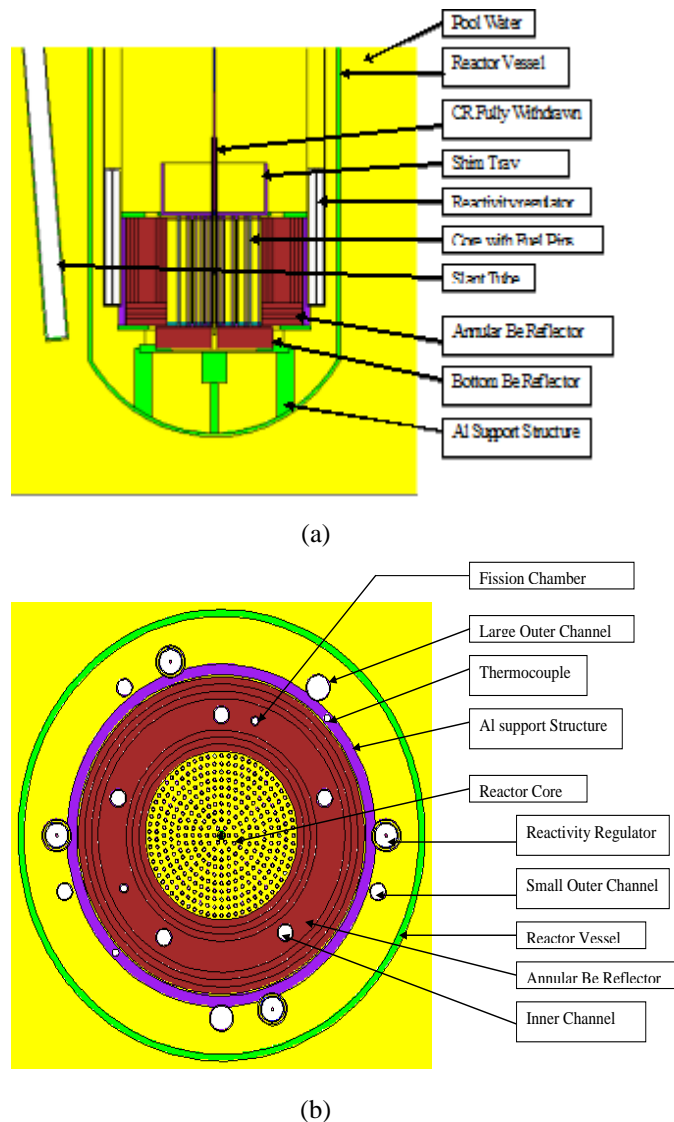


Fig. 1 MCNP Axial and Radial view of NIRR-1

and few radioisotopes production. The reactor went critical in February 4, 2004 and since then it has been operated safely (Jonah *et al.* 2007). Axial and radial view of the NIRR-1 reactor as depicted by the MCNP code reactor is shown in Fig. 1

The RERTR programme in the United States has supported the conversion of research and test reactors from the use of Highly Enriched Uranium (HEU) to Low Enriched Uranium (LEU) since 1978 (Ibrahim *et al.* 2013). Achieving the conversion of the NIRR-1 reactor from the current use of HEU is a good step in reducing and eventual elimination of HEU fuel in civil use (Trivelli 1999). A study by Jonah and Ibikunle (2009) has shown that it is possible to convert the reactor to LEU with enrichment of about 12.5% UO_2 fuel clad in Zr-4. Moreover, the core of the reactor is designed to operate for 10 years; core replacement is under consideration having operated for over

Table 1 technical specification of NIRRR-1 HEU and LEU cores

Parameter	HEU	LEU
Meat density (g/cm ³)	3.456	10.6
Meat diameter (cm)	0.43	0.43
Clad thickness	0.06	0.06
Fuel meat OD	4.3	4.3
Fuel rod OD	5.5	5.5
Reactor power (kW)	31	34
Number of fuel pins in core	347	348
Enrichment (%)	90.2	12.5
Material for grid plates	LT-21	Zirc-4
Materials for grid plates	LT-21	Zirc-4
Number of fuel rods	347	348
Meat diameter mm	4.3	4.3
Cladding diameter mm	5.5	5.5

10 years. When converting from HEU to LEU materials in the fuel, density of each fuel, the fuel cladding, tie rod materials and grid plate materials have to be changed. Technical specifications of NIRRR-1 HEU and LEU cores are given in Table 1.

In preparation for the conversion of NIRRR-1 from HEU to LEU, point kinetics parameters such as prompt neutron lifetime must be calculated from safety point of view. In this work, we will employ two methods to calculate the prompt neutron lifetime using the MCNP code. This methods was also used by some authors (Albert and Diamond 2006, Heba 2014, Rabira and Haha 2013) for other reactors.

2. Method of analysis

2.1 The 1/v insertion method

The 1/v insertion method is a simple but accurate way to calculate the prompt neutron lifetime (Brestcher 1997). The method consists of inserting a small amount of 1/v-absorber into the core. This results in a negative reactivity insertion. The reactivity change after the absorber is calculated using

$$\rho = \frac{k_{ref} - k_p}{k_p} \quad (1)$$

where ρ is the negative excess reactivity, k_{ref} eigenvalue without 1/v-absorber and k_p eigenvalue with 1/v-absorber.

In the prompt neutron lifetime calculation, k_p was calculated for different concentrations of ¹⁰B added to the reactor materials. The 1/v approach was performed by adding ¹⁰B uniformly throughout the materials of the reactor with concentrations of 7.5×10^{-8} atoms/b-cm and 1.5×10^{-7}

atoms/b-cm. The reactivity insertion from the addition of the ^{10}B concentration was calculated using the relation (Brestcher 1997)

$$l_p' \equiv \frac{1}{N\sigma_0 v_0} \frac{k_{ref} - k_p}{k_p} \quad (2)$$

Where N is the number density of the $1/v$ absorber, σ_0 is its reference absorption cross section, and v_0 is its reference speed. At $v_0=2200$ m/s, $\sigma_0(^{10}\text{B})=3837$ barns. The prompt neutron lifetime estimate, l_p , for the unperturbed core is calculated as the amount of $1/v$ absorber approaches to zero

$$l_p = \lim_{N \rightarrow 0} l_p' = \lim_{N \rightarrow 0} \left[\frac{1}{N\sigma_0 v_0} \frac{k_{ref} - k_p}{k_p} \right] \quad (3)$$

The limit as $N \rightarrow 0$ was obtained by computing the eigenvalue for two different boron concentrations N_1 and N_2 , evaluating l_p' for each boron concentration, and linearly extrapolating l_p' to $N=0$. That is

$$l_p = l_{p1}' + \frac{l_{p2}' - l_{p1}'}{N_2 - N_1} (0 - N_1) \quad (4)$$

where $l_{p1}' = l_p'(N_1)$ and $l_{p2}' = l_p'(N_2)$. The statistical uncertainty in k must be propagated through the evaluation of l_p' and the linear extrapolation to l_p .

$$\sigma_{l_p'} \equiv l_p' \sqrt{\frac{\sigma_{ref}^2 + \sigma_p^2}{(k_{ref} - k_p)^2} + \frac{\sigma_p^2}{k_p^2}} \quad (5)$$

where σ_{ref} and σ_p are statistical uncertainties in k_{ref} and k_p , respectively. The statistical uncertainty in the lifetime estimate is given by

$$\sigma_{l_p} \equiv \sqrt{\left(\frac{l_p - l_{p1}'}{l_{p2}' - l_{p1}'} \right)^2 \left(\sigma_{l_{p1}'}^2 + \sigma_{l_{p2}'}^2 \right) + \sigma_{l_{p1}'}^2} \quad (6)$$

where $\sigma_{l_{p1}'}$ and $\sigma_{l_{p2}'}$ are the uncertainties in l_{p1}' and l_{p2}' as calculated by Eq. (5)

The eigenvalues for k_{ref} and k_p (for the two ^{10}B concentrations) were computed using the MCNP5 version 1.50 with ENDF-VII libraries. The problem was run as a KCODE problem tracking 1.6 billion particle histories (2 million histories per cycle in 830 cycles, skipping 30 cycles for convergence). The results obtained for the $1/v$ insertion for both HEU and LEU are presented in Table 1. The MCNP code has recently been used in the calculations of reactor physics parameters of the of several reactors (Snoj *et al.* 2010, Abtin *et al.* 2013, Lyliya and Houcine 2011, Abrefah *et al.* 2012, Jonah *et al.* 2012) including design of thermal and epithermal filters for radiography using reactors (Li *et al.* 2009, Ismail 2010) and detector efficiency calibration, Chan (2011) and the prediction of Isotopes (peters *et al.* 2009). The MCNP model for NIRR-1 has since been developed (Jonah *et al.* 2007) and has been optimized for various reactor physics calculations (Ibrahim *et al.* 2012, 2013).

2.2 The adjoint flux weighing method

This method of estimating the prompt neutron lifetime employs the use of (kiedrowski *et al.* 2011)

$$l_p = \frac{\langle \psi^*, \mathbf{v}^{-1} \psi \rangle}{\langle \psi^*, F \psi \rangle} \quad (7)$$

where ψ is the neutron flux, ψ^* the adjoint flux, \mathbf{v} is the neutron speed and F is the operator for total (prompt plus delayed) Fission. The brackets denote integration over all space, energy, and direction in the reactor. The MCNP5-1.60 has the capability of calculating the neutron lifetime based on Eq. (7); MCNP5 (2003). For the NIRR-1 reactor a new KCODE binary source distribution different from the one used in MCNP5-1.50 input was created to accommodate this new feature of calculating the prompt neutron lifetime in MCNP5-1.60. As in the case of the $1/v$ insertion using the MCNP5-1.50, 1.6 billion particles were tracked and the adjoint flux is calculate in 10 cycles (kiedrowski *et al.* 2011) with the *kopts* card in the criticality (KCODE) problem. The KOPTS card is specified in the data card section and takes the format

$$\text{kopts blocksize} = 10 \text{ kinetics} = \text{yes} \quad (8)$$

3. Results and discussion

The results obtained for the $1/v$ insertion method for both HEU and LEU including the eigenvalues is presented in table 1 while the result based on the adjoint flux weighing method is presented in Table 2.

The prompt neutron lifetime values obtained using the two methods are in good agreement. The two methods indicate that there is a decrease in the prompt neutron lifetime as you move from HEU to LEU as expected due to hard spectrum in the LEU fuel. This trend was also observed by some authors (Verboom 2006, Jonah and Ibikunle 2009, Odoi *et al.* 2014).

Table 2 MCNP results with ^{10}B insertion for the HEU and LEU

^{10}B conc. Atoms/b-cm	HEU			LEU		
	k_{eff}	$l_p'(\mu\text{s})$	$l_p(\mu\text{s})$	k_{eff}	$l_p'(\mu\text{s})$	$l_p(\mu\text{s})$
0.0	1.00474±0.00002	-		1.00475±0.00002	-	
7.5E-8	1.00127±0.00003	57.3±0.6		1.00176±0.00002	47.1±0.7	
1.5E-7	0.99185±0.00002	52.1±0.2	57.3±0.8	0.99883±0.00002	46.8±0.8	47.5±0.7

Table 3 Prompt neutron lifetime estimates for HEU and LEU Core

Method	HEU l_p (μs)	LEU l_p (μs)
$1/v$ Insertion	57.3±0.8	47.5±0.7
MCNP	56.9±0.3	46.3±0.5

The measured value of prompt neutron lifetime mentioned in the SAR is $81 \mu\text{s}$ (SAR 2005) The value of the neutron lifetime obtained using the new capability in the MCNP5 version 1.60 agrees very well with the value of 5.79 ± 0.19 and 4.70 ± 0.7 earlier reported for HEU and LEU core respectively (Jonah *et al.* 2007, Jonah and Ibikunle 2009) This indicates the capability in the MCNP5-1.60 to calculate neutron lifetime for NIRR-1 reactor without diluting the reactor materials with $1/v$ absorber.

4. Conclusions

The $1/v$ insertion method and the Adjoint flux weighing methods were used in the calculation of prompt neutron lifetime for the NIRR-1 reactor. The neutron lifetime was found to be shorter for the LEU core as expected due to the hard spectrum. There is a good agreement between the two methods used and measured value. However, the Adjoint flux weighing method was found to be the easiest way for the calculation neutron lifetime in NIRR-1 reactor.

Acknowledgements

This work was supported by the IAEA under the CRP “conversion of Miniature Source Reactor to LEU” No. NIR/13934 and the RERTR Group of the Nuclear Engineering Division, Argonne National Laboratory, USA.

References

- Abrefah, R.G., Odoi, H.C., Ampomah-Amoako, E. and Mensimah, E. (2012), “Investigation into the effects of Zircaloy-4 on the neutronics of low enriched uranium MNSR core”, *Prog. Nucl. Energy*, **54**(1), 5-10.
- Abtin, F., Fegghi, S.A.H. and Jafarikia, S. (2013), “Neutronic evaluations for MNSR research reactor core conversion from HEU to LEU”, *Ann. Nucl. Energy*, **51**, 69-73.
- Albert, L.H. and Diamond, D.J. (2006), “Calculation of the prompt neutron lifetime in NBSR”, *Nucl. Sci. Eng.*, **153**, 26-32.
- Bretscher, M.M. (1997), “Perturbation-Independent Methods for Calculating Research Reactor Kinetic Parameters”, ANL/RERTR/TM-30, Argonne national Laboratory, December.
- Final Safety Analysis Report of Nigeria Research Reactor-1, (2005), CERT Technical Report-CERT/NIRR-1/FSAR-01.
- Haddad, K. and Boush, M. (2011), “Validation of MCNP volume efficiency calculation for gamma spectrometric assay of large NORM samples”, *J. Radio. Nucl. Chem.*, **289**, 97-101.
- Hamidou, L. and Benkharfia, H. (2011), “Experimental and MCNP calculations of neutron flux parameters in irradiation channel at Es-Salam reactor”, *J. Radio. Nucl. Chem.*, **287**, 971-975.
- Heba, K.L. (2014), “Evaluation of effective prompt neutron lifetime for pressurized water reactors”, *Nucl. Tech.*, **188**, 1-7.
- Kiedrowski, B., Brown, F. and Wilson, P. (2011), “Adjoint-weighted tallies for k -eigenvalue calculations with continuous-energy Monte Carlo”, *Nucl. Sci. Eng.*, **168**, 226-241.
- Odoi, H.C., Akaho, E.H.K., Jonah, S.A., Abrefah, R.G. and Ibrahim, V.Y. (2014), “Study of criticality safety and neutronic performance for a 348-Fuel-Pin Ghana research reactor-1 LEU core using MCNP code”, *World J. Nucl. Sci. Tech.*, **4**, 46-52.
- Ibrahim, Y.V., Odoi, H.C., Njinga, R.L., Odeleye, M.O. and Jonah, S.A. (2012), “Monte Carlo simulation of

- additional safety control rod for commercial MNSR to enhance safety”, *Ann. Nucl. Energy*, **44**, 71-75.
- Ibrahim, Y.V., Odoi, H.C., Thomas, J.W. and Jonah, S.A. (2013), “Design options of control rod for low enriched uranium fueled NIRR-1 using Monte Carlo N-particle code”, *J. Nucl. Energy Sci. Power Gen. Tech.*, **2**, doi:10.4172/2325-9809.1000104.
- Jonah, S.A., Liaw, J.R. and Matos, J.E. (2007), “Monte Carlo simulation of core physics parameters of nigerian research reactor-1”, *Ann. Nucl. Energy*, **34**, 953-957.
- Jonah, S.A., Ibikunle, K. and Li, Y. (2009), “A feasibility study of LEU enrichment uranium fuels for MNSR conversion using MCNP”, *Ann. Nucl. Energy*, **36**, 1285-1286.
- Jonah, S.A., Ibrahim, Y.V., Ajujia, A.S. and Onimisi, M.Y. (2012), “The impact of HEU to LEU conversion of commercial MNSR: determination of neutron spectrum parameters in irradiation channels of NIRR-1 using MCNP code”, *Ann. Nucl. Energy*, **39**, 15-17.
- Khattab, K. and Sulieman, I. (2009), “Calculations of the thermal and fast neutron fluxes in the Syrian MNSR irradiation sites using the MCNP-4C code”, *Appl. Radiat. Isotop.*, **67**, 535-538.
- Li, Y., Ke, G., Sun, Z., Shen, F., Liu, T. and Zhou, Y. (2009), “The study of physics and thermal characteristics for in-hospital neutron irradiator (INHI)”, *Appl. Radiat. Isotop.*, **67**, S234-S237.
- MCNP5 (2003), A general Monte Carlo N-Particle Code, LA-UR-03-1987, Updates to the MCNP5 used for the delayed neutron fraction and prompt neutron lifetime calculations, Eds. B.C. Kiedrowski, T.E. Booth, F.B. Brown, J.S. Bull, J.A. Favorite, R.A. Forster, R.L. Martz, MCNP5-1.60 Feature Enhancements & Manual Clarifications, LA-UR-10-06217.
- Peters, N.J., Brockman, J.D. and Robertson, J.D. (2009), “Using Monte Carlo transport to accurately predict isotope production and activation analysis rates at the University of Missouri research reactor”, *J. Radio. Nucl. Chem.*, **282**, 255-259.
- Rabira, M.H. and Haha, C.J. (2013), “Evaluation of Delayed Neutron Fraction of RTP using MCNP”, *Transactions of the Korean Nuclear Society Spring Meeting*, Gwangju, Korea, May.
- Shaaban, I. (2010), “Design of the thermal neutron beam for neutron radiography at the Syrian MNSR”, *Ann. Nucl. Energy*, **37**, 1588-1594.
- Snoj, L., Kavcic, A., Zerovnik, G. and Ravnik, M. (2010), “Calculation of kinetic parameters for mixed TRIGA cores with Monte Carlo”, *Ann. Nucl. Energy*, **37**, 223-229.
- Travelli, F.A. (1999), *Progress of RERTR Programme*, 22nd RERTR Meeting Budapest, Hungary.
- Verboomen, B., Haec, W. and Baeten, P. (2006), “Monte Carlo calculation of the effective neutron generation time”, *Ann. Nucl. Energy*, **33**, 911-916.